


RO-FLEX 22775F
Robot cable. wires. Oil resistant PVC cable with two or more conductors.

WORLD WIDE STANDARD CABLE.
C3-Series

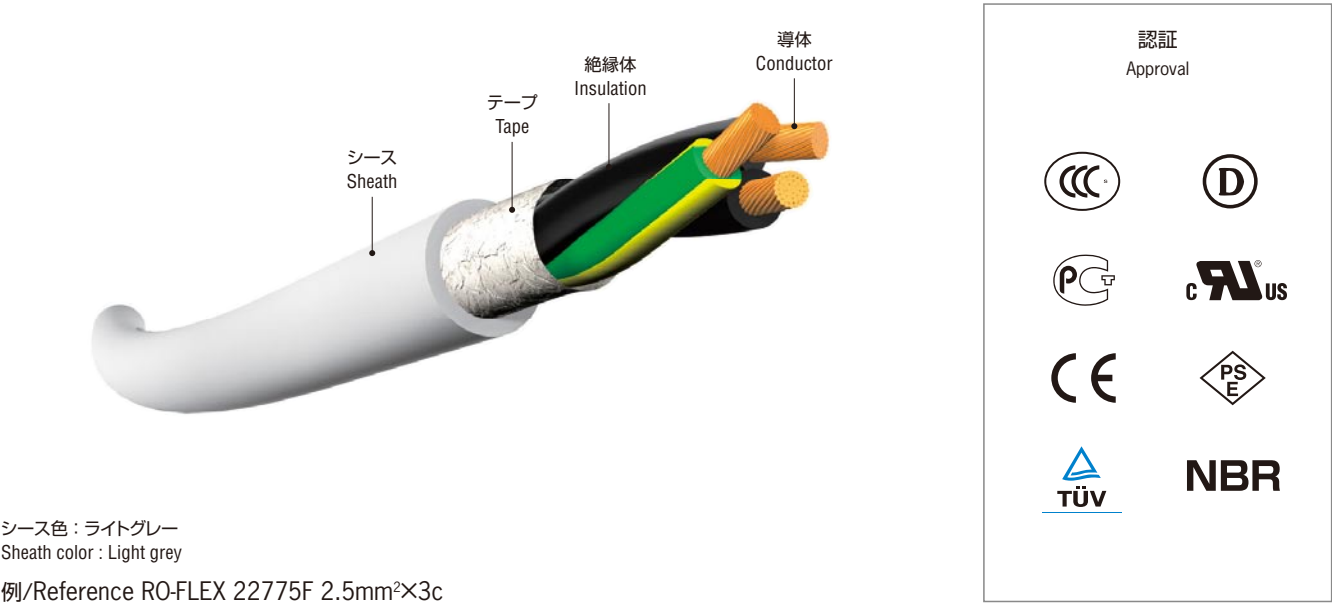

シース色：ライトグレー
Sheath color : Light grey
例/Reference RO-FLEX 22775F 2.5mm²×3c

Table with 10 columns: ケーブル特性 (Cable characteristics), 耐熱性 (Heat resistance), 耐寒性 (Cold resistance), 耐油性 (Oil resistance), 難燃性 (Flame retardant), 耐屈曲性 (Flexing), 耐ノイズ性 (Noise resistance), 配線 (Wiring), RoHS指令 (RoHS Directive), アウトガス対応 (Outgas). It lists various performance levels like +105°C, 0°C, A, B, D, AC/DC動力回路, 適合 (Conformity), and C.

※ケーブル特性については、巻末の技術データを参照して下さい。Refer to technical data.

用 途 Application
1. 可動部
2. 電源線
1. Constant movement
2. Power line

特 長 Characteristics
NBR, CCC, GOST-R, IEC, CE, UL, c-UL, PSEに適合しており1つのケーブルで国内及び多国の輸出に使用できます。又、設計の簡素化と在庫の低減につながり従来よりも効率の良い設計管理と在庫管理に最適です。このケーブルは『低電圧指令』2006/95/ECに適合しています。又、「RoHS指令」2011/65/EUに適應しています。
RO-FLEX 22775F series enable to simplify the design and efficient storage for the reduction of costs due to NBR, CCC, GOST-R, IEC, CE, UL, c-UL and PSE approvals. The product is in conformity to EC directive 2006/95("Low voltage directive"). "Conformity to RoHS directive 2011/65/EU"

Table with 10 columns: 項目 (Item), IEC, CCC, GOST R, CE, NBR, UL, c-UL, PSE. It details certification information, characteristics like rated voltage, test voltage, insulation resistance, and construction details like conductor and insulation materials.

Table with 2 columns: 化学物質 (Chemical substances), 含有率 ppm (Content ppm). It lists RoHS directive compliance for substances like Lead, Mercury, Cadmium, Hexavalent Chromium, PBB, and PBDE.

Table with 9 columns: 商品番号 (Part number), 導体断面積 (Nominal cross sectional area), 導体構成/外径 (Conductor composition/ diameter), 絶縁外径 (Diameter of insulation), 芯数 (No. of cores), 仕上外径 (Approx. Overall diameter), 概算質量 (Approx.mass), 導体抵抗 (Conductor resistance), 許容電流 (Current Carrying Capacities). It provides detailed specifications for various cable models.

●販売条長：153m Standard length：153m (500Ft)